




AL812 PVC FOAM

MATERIAL SPECIFICATION SHEET

PROPERTY	AVERAGE VALUE
Density	100 – 125 kg/m ³
Compression Set	<20 %
Shore Hardness OO Scale	7-30
Elongation at Break	> 120 %
Temperature Range (Constant)	- 30 °C / + 60 °C
Temperature Range (Intermittent)	+ 70 °C
Tear Strength	>0.7 N/mm
Waterseal Compression	> 90 %
Flame Resistance (> 6mm)	FMVSS302 - Pass
Environmental Protection	CFC & HCFC Free

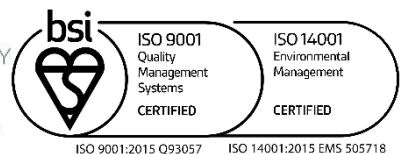

ISO 9001:2015 Q93057 ISO 14001:2015 EMS 505718

The company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company