


ANSI – ASME- B16.21

N-Bore		Full Face (mm)					ASME B16.21	IBC (mm)	
in	mm	OD	ID	Holes	Dia.	P.C.D.	CLASS 2500	OD	ID
0.5	15	133	21	4	22	89		70	21
0.75	20	140	27	4	22	95		76	27
1	25	159	33	4	25	108		86	33
1.25	32	184	42	4	29	130		105	42
1.5	40	203	48	4	32	146		118	48
2	50	235	60	8	29	171		146	60
2.5	65	267	73	8	32	197		168	73
3	80	305	89	8	35	229		197	89
4	100	356	114	8	41	273		235	114
5	125	419	141	8	48	324		279	141
6	150	483	168	8	54	368		318	168
8	200	552	219	12	54	438		388	219
10	250	673	273	12	67	540		477	273
12	300	762	324	12	73	619		549	324

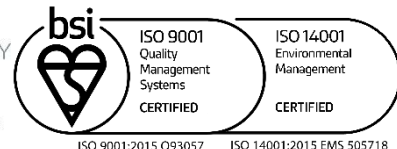

The company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company