


ANSI – ASME- B16.47 B

N-Bore		Full Face (mm)					ASME B16.47 B	IBC (mm)	
in	mm	OD	ID	Holes	Dia.	P.C.D.	CLASS 150	OD	ID
26	650	786	660	36	22	745		725	660
28	700	837	711	40	22	795		776	711
30	750	887	762	44	22	846		827	762
32	800	941	816	48	22	900		881	816
34	850	1005	864	40	25	957		935	864
36	900	1057	914	44	25	1010		987	914
38	950	1124	965	40	29	1070		1045	965
40	1000	1175	1016	44	29	1121		1095	1016
42	1050	1226	1067	48	29	1172		1146	1067
44	1110	1276	1118	52	29	1222		1197	1118
46	1150	1341	1168	40	32	1284		1256	1168
48	1200	1392	1219	44	32	1335		1307	1219
50	1250	1443	1270	48	32	1386		1357	1270
52	1300	1494	1321	52	32	1437		1408	1321
54	1350	1594	1372	56	32	1492		1464	1372
56	1400	1600	1422	60	32	1543		1514	1422
58	1450	1675	1473	48	35	1611		1580	1473
60	1500	1726	1524	52	35	1662		1630	1524

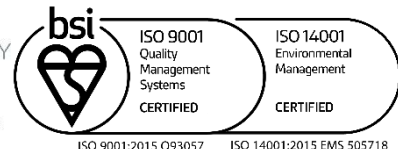

The company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company